

AW series

过滤减压阀
Filter+Regulator



规格/Specification

符号/Symbol

保证耐压 Ensured Pressure Resistance	1.5MPa(15kgf/cm ²)
最高使用压力 Highest Working Pressure	1.0MPa(10kgf/cm ²)
环境及流体温度 Ambient and Fluid Temperature	5~60℃
*过滤精度 *Filter Precision	25um
容器材料 Container Material	聚碳酸酯/Polycarbonate
防护罩 Protective Cover	有Available
调压范围 Pressure Regulating Range	0.05~0.85MPa(0.5~8.5kgf/cm ²)
阀型 Valve Type	带溢流型 With Overflow

还有5、50um可供选择。/*5、50 m available in addition

AW


型号 Model	规格 Specifications				配件/Accessories		放水器功能 /Drain Function	自动排水型号 /Auto Drain Model		
	*额定流量 /Rated Flow(L/min)	**接管口径 /Port Size(G)	压力表口径 /Pressure Gauge Size	重量 /Weight(kg)	托架 /Bracket	压力表 /Pressure Gauge				
AW2000-01	550	1/8	1/8	0.3	B220	G36-10-01	手动排水 /Manual Drain			
AW2000-02		1/4								
AW3000-02	2000	1/4	1/8	0.53	B320	G36-10-01	a 停气排水 /Air Shut off Drain	AW3000-02D		
AW3000-03		3/8						AW3000-03D		
AW4000-03	4000	3/8	1/4	1.15	B420	G46-10-02	b 手动排水 /Manual Drain	AW4000-03D		
AW4000-04		1/2						AW4000-04D		
AW4000-06	4500	3/4	1/4	1.19	B420	G46-10-02		AW4000-06D		
AW5000-06	5500	3/4	1/4	1.78						AW5000-06D
AW5000-10		1								AW5000-10D

*供应压力为0.7MPa(7.1kgf/cm²)设定压力为0.5MPa(5.1kgf/cm²)的情况下

*Under the circumstance that the supply pressure is 0.7MPa(7.1kgf/cm²) and set pressure is 0.5MPa(5.1kgf/cm²)

**接管口径有G、NPT两种可供选择
Rc and NPT port size are available

外形尺寸图/Overall Dimension Drawing (mm)

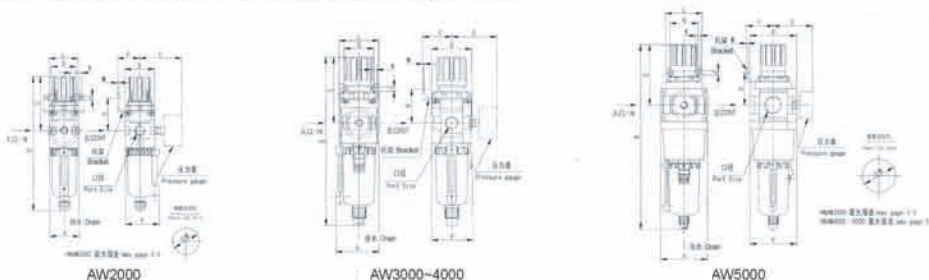

型号Model	口径 /Port Size(G)	A	B	C	D	E	F	G	H	J	K	L	M	P	N
AW2000	1/8~1/4	40	180	78	40	56.8	30	34	43.5	5.4	15.4	55	2.3	40	33.5
AW3000	1/4~3/8	53	218	92.5	53	60.8	39	40	46	6.5	8	53	2.3	56	42.5
AW4000	3/8~1/2	70	269.5	112	70	70.5	49.2	54	53.5	8.5	10.5	70	2.3	73	52.5
AW4000-06	3/4	75	273.5	114	70	70.5	49.2	54	55.5	8.5	10.5	70	2.3	73	52.5
AW5000	3/4~1	90	346.5	116	90	75.5	49.2	54	62	8.5	10.5	70	2.3	90	52.5

