

EN series

消音器系列
Silencers




规格/SPECIFICATION

工作介质/Fluids	洁净空气
最大使用压力/Max.Press	1.0MPa
消音效果/Noise Reduction	30dB (A) 或以上
工作温度/Fluids Temp	5 - 60°C

特性/CHARACTERISTIC

- 1、消音效果（超过30dB）；
- 2、背压低；
- 3、易于安装。

符号/MARK



订购码/ORDERING NO.

EN

01

B

螺纹规格

- 01: Rc1/8
- 02: Rc1/4
- 03: Rc3/8
- 04: Rc1/2

壳体颜色

- B: Black
- W: White




EN

外部规格/Dimensions



型号	R	øB	L	C	A	H1	H2	G1	G2	QTY/BOX
EN01	Rc1/8	16	41.2	24.5	8	14	8	6.9	1.8	100
EN02	Rc1/4	21	65	42.6	11	19	12	9.6	1.8	40
EN03	Rc3/8	25	83.5	59	12.5	22	14	10	2	20
EN04	Rc1/2	30	94.5	68	14	26	19	10	2.5	12

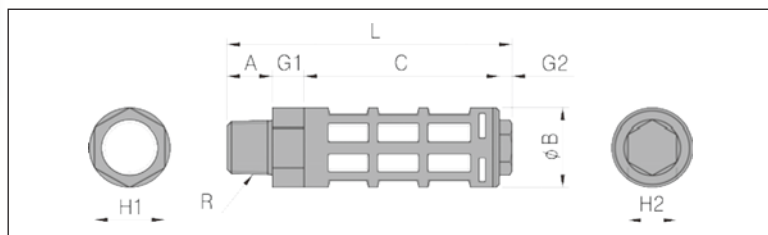

F-TEC

D-35

www.F-TEC.cn

EN series

消音器系列
Silencers



规格/SPECIFICATION

工作介质/Fluids	洁净空气
最大使用压力/Max.Press	0.99MPa
工作温度/Fluids Temp	5 ~ 150°C

特性/CHARACTERISTIC

- 1、耐高温;
- 2、背压低;
- 3、易于安装。

符号/MARK




订购码/ORDERING NO.

EN 101 - 01

螺纹规格

- 01: Rc1/8
- 02: Rc1/4
- 03: Rc3/8
- 04: Rc1/2

内部构造/Construction

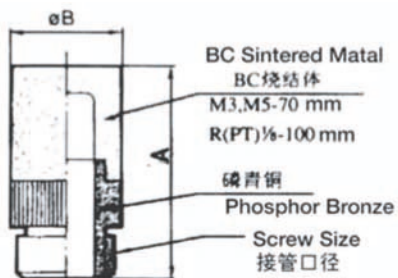

型号 Model	接管口径 Port size (Rc/PT)	有效断面积 (mm ²) Eff. Section area	消音效果 (dB) Noise Reduction	质量 Weight
EN120-M3	M3x0.5	1	13	1
EN120-M5	M5x0.8	5	18	3.3
EN101-01	1/8"	20	16	9.5
EN110-01	1/8"	35	21	20
EN201-02	1/4"	50	26	35
EN301-03	3/8"	70	38	45
EN401-04	1/2"	100	55	60
EN501-06	3/4"	150	80	80
EN601-10	1"	200	110	100

